


HA26 USB Handset

USB handset with PTT button and 2 buttons for volume control

Article Number

01 6506 00800051

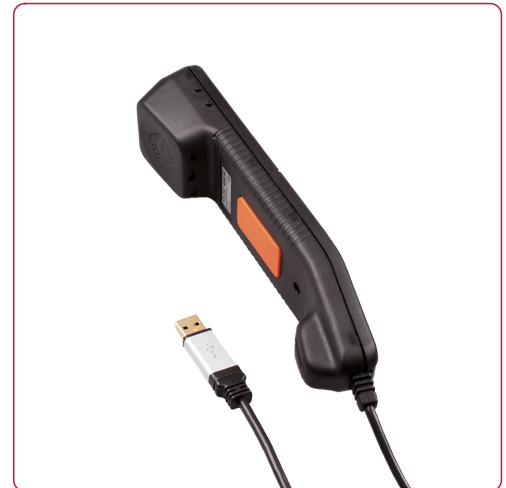

Characteristics

- Unidirectional noise cancelling electret microphone capsule
- Dynamic ear capsule
- Solid plastic housing
- 2 buttons for volume control
- Automatic hook-switch mechanism (A12 cradle only)
- Large push-to-talk button

Scope of delivery

- Handset with USB-A cable 3 m

Options

- Customized HID coding
- [Minor modifications and individual adaptations](#) on request

Application range

- Dispatcher and PA systems with increased ambient noise

Accessories

- A10 cradle
- A12, A12/2 cradle

Specifications

General

Housing	PC-ABS plastic, black
Dimensions	Height 41 mm, width 58 mm, depth 209 mm
Weight	195 g (6.9 oz)
Connection	Halogen-free cable, shielded, length 3 m, USB-A connector
Operating elements	1 PTT button (orange), 2 buttons for volume control (programmable)
Storage temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating temperature	-25 °C to +60 °C (-13 °F to +140 °F)

Microphone

Operating voltage	5 V USB (DC)
Frequency range	200 Hz to 14 kHz at -10 dB
Sensitivity (in LRGP)	2 mV/Pa (-54 dBV/Pa ± 3 dB)
Impedance	> 1 kOhm ± 20 % at 1 kHz/RL = 2 kOhm
Directivity	Cardioid

Earpiece

Frequency range	300 Hz to 4 kHz at -10 dB
Sensitivity	26 dBPa/V ± 3 dB
Impedance	300 Ohm ± 20 % at 1 kHz
Maximum output	10 mW