


# V856-101 Amplifier

Universal 2 and 3 wire amplifier for  
dynamic microphones

## Article Number

01 6089 85610100

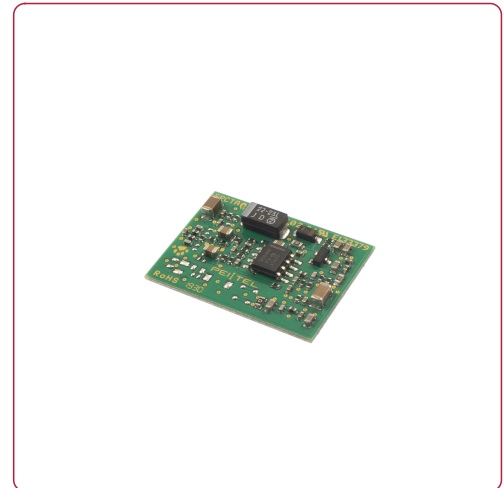

## Characteristics

- Replaces all previous pei tel amplifier versions
- Adjustment via DIP switches and jumpers

## Scope of delivery

- Amplifier circuit board
- Connecting diagram

## Application range

- For dynamic microphones with slot for amplifiers

## Specifications

### General

Dimensions	Height 6 mm, width 19 mm, depth 26 mm
Weight	3 g (0.11 oz)
Connection	Solder pads
Storage temperature	-40 °C to +105 °C (-40 °F to +221 °F)
Operating temperature	-30 °C to +80 °C (-22 °F to +176 °F)
2-wire operating voltage	2 V to 32 V (DC)
3-wire operating voltage	2 V to 32 V (DC)
Frequency range	50 Hz to 10 kHz at -10 dB
Amplification	35 dB to 62 dB